



COMPONENTS

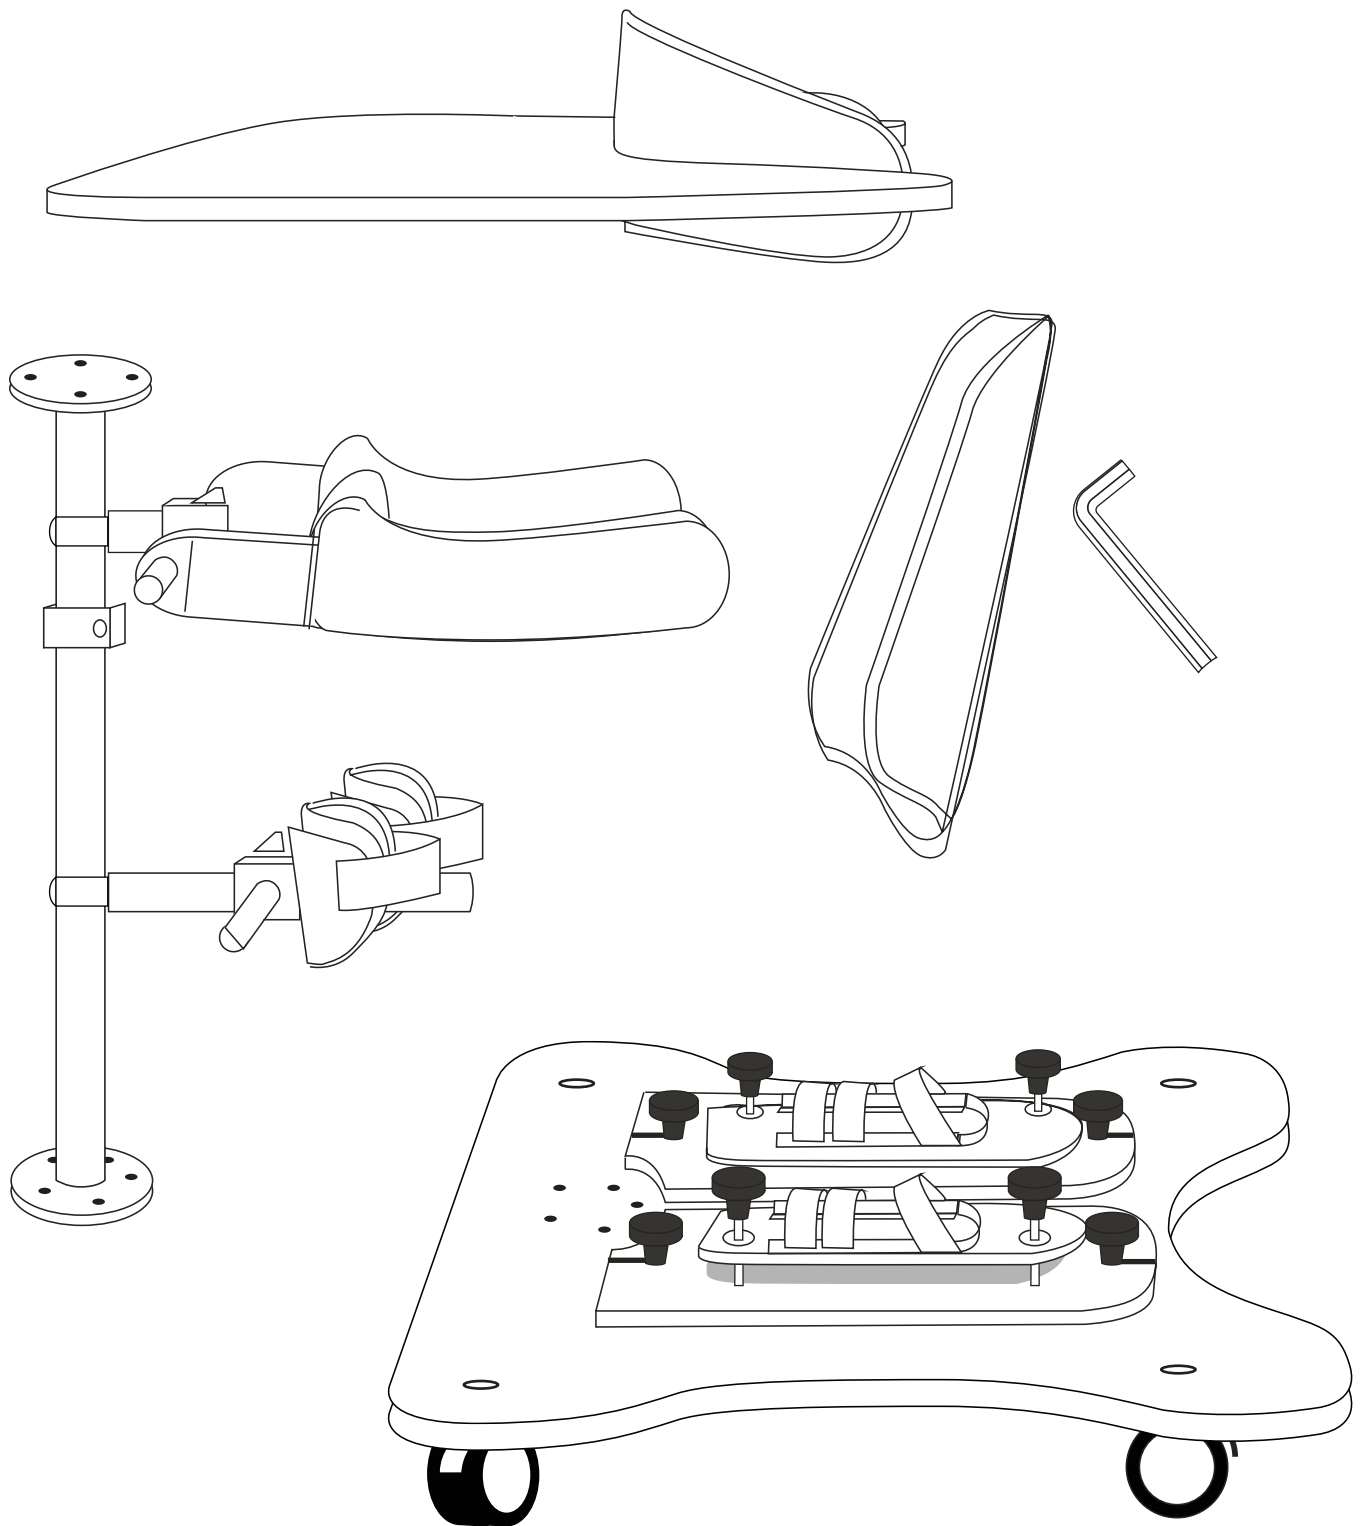

FIRST INSTALLATION

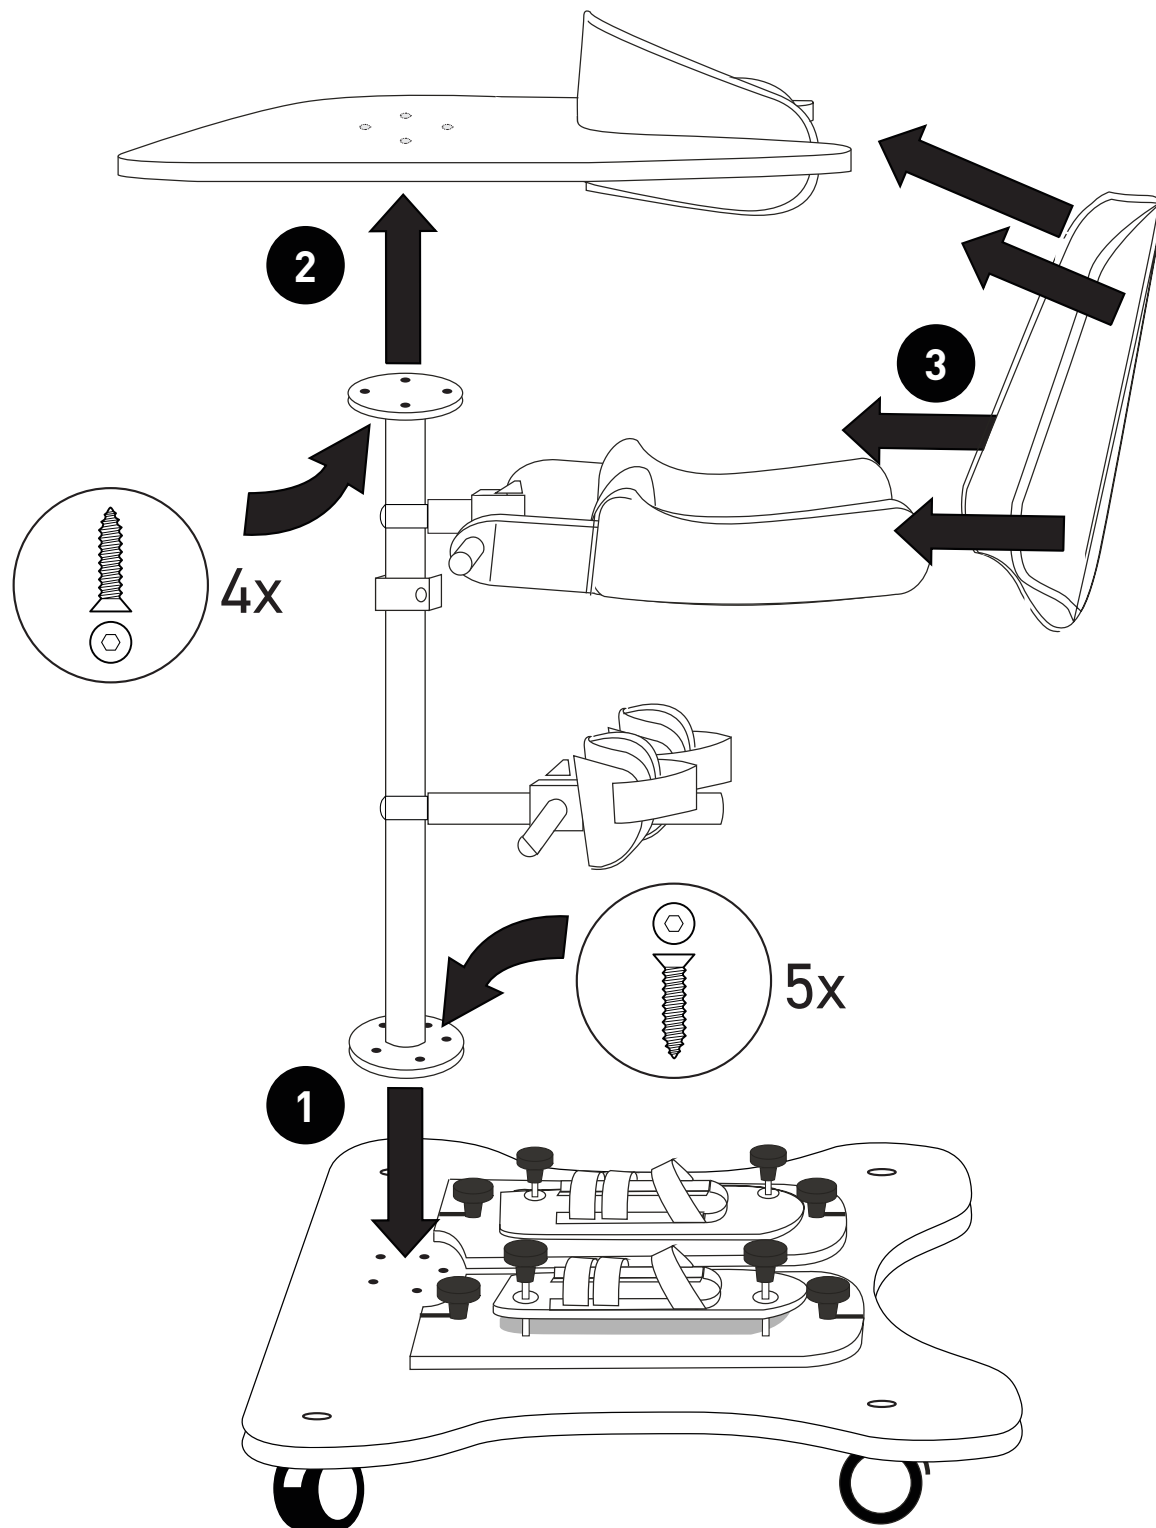

1

Apply the vertical column to the base with the correct side (top/bottom) facing, and tighten using 5 screws

Note: Tighten each screw evenly, diagonally.

2

Fit the table to the upper part of the vertical column. Tighten using 4 screws.

3

Attach the TLS pad using two straps with 4 quick-release buckles: two to the hip ring of the orthosis, and two to the table. Adjust the circumference.